

Triple-Beam X-ray Inspection System



Model RXP-2025SO

// PRODUCT HIGHLIGHTS

- **Exceptional Quality**—The most reliable jar and canister X-ray inspection system available
- **Adjustable Point of View**—Three X-ray beams deliver multiple adjustable views for many types of jars, bottles, cans and more
- **Highly Accurate**—Triple-beam technology provides unmatched contaminant detection accuracy
- **No Blind Spots**—100% product coverage and inspection



Model RXP-2025SO

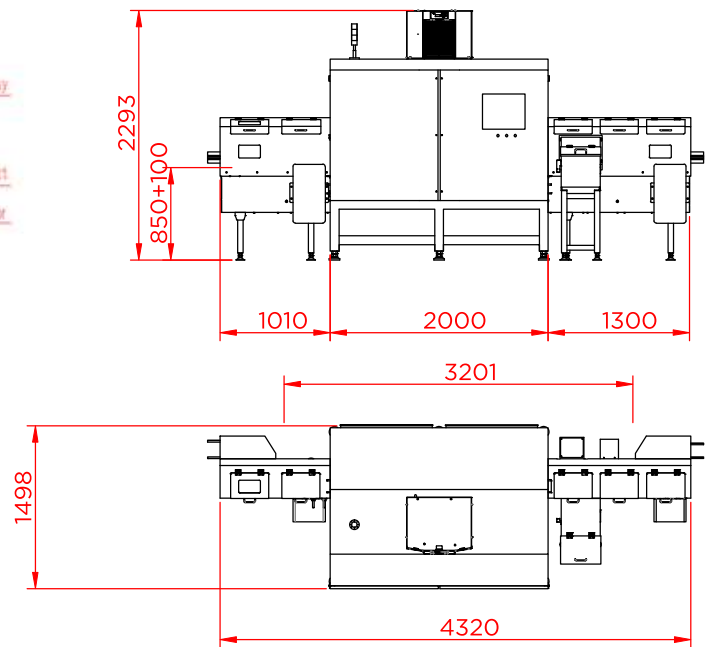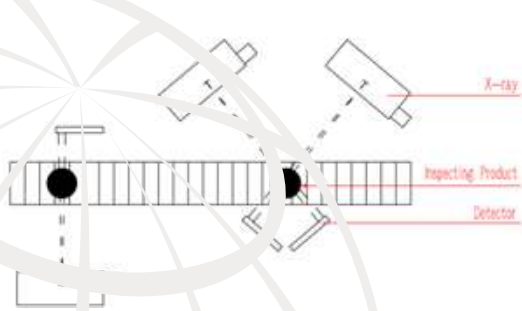

X-ray Generator	Max voltage 120kV, 480W (three for each)
Inspection Width	160mm
Inspection Height	260mm
Best Inspection Sensitivity¹ (without product)	Stainless steel ball Φ0.4mm, Stainless steel wire Φ0.2*2mm, Glass/ceramic ball Φ1.0mm
Conveyor Speed	10-60 m/min
Operation System	Windows® 7
Protection Method	Protective tunnel
X-ray Leakage	< 0.5 μSv/h
IP Rate (under belt)	IP52 (stand) IP 66 optional
Working Environment	Temperature: -10~40 °C
	Humidity: 30-90% no dew
Cooling Method	Industrial air conditioning
Rejecter Mode	Push rejecter
Air Pressure	0.8Mpa
Power Supply	4.5kVA
Main Material	SUS304
Surface Treatment	Mirror polish/sandblasting

1. Sensitivity parameter is the result of inspecting only the test sample on the belt. The actual sensitivity would be affected according to the products being inspected.



974 Corporate Woods Parkway, Vernon Hills, IL 60061, USA
tdipacksys.com
 P 877.TDI.6750 • F 847.620.0676 • sales@tdipacksys.com

