SAVVY Palletizing Solutions

TDI PACKSYS

99% OVERALL EQUIPMENT EFFECTIVENESS GUARANTEED

ANY TYPE AND SIZE OF CASE

TDI PACKSYS

SAVVY PAL CONFIGURATION

IN 3 MINUTES

HEIGHT OF THE PALLET : ☐ UP TO 6ft / 75"   ☐ UP TO 8ft / 94"

PALLET DIMENSION : ☐ 40"x 48"   ☐ OTHER _____

	Dimensions	Weight	NºLayers	Pattern (optional)	Required capacity	Slip sheet on layers	Pallet type
CASE 1							☐ REGULAR ☐ GMA ☐ CHEP
CASE 2							☐ REGULAR ☐ GMA ☐ CHEP
CASE 3							☐ REGULAR ☐ GMA ☐ CHEP
CASE 3							☐ REGULAR ☐ GMA ☐ CHEP

TECHNICAL INFORMATION

SAVVY PAL

GENERAL CHARACTERISTICS

Dimensions	24ft x 11ft
Free height	15ft - 16ft 177" - 197"
Entry height	Minimum 32" Maximum 48"
Pallet exit height	3,5" (with forklift) 19,7"

ELECTRICAL CHARACTERISTICS

Electrical installation	480V/3PH/60Hz
Power consumption	9 - 11Kw
Air pressure	6 bar

PNEUMATIC CONSUMPTION

Pneumatic rammer without suction	2,35ft^3/min
Pneumatic rammer with suction	3,83ft^3/min

ROBOT

Model	FANUC R - 2000iC/125L	
Maximum load	Without slip sheet up to 35 kg	With slip sheet up to 30 kg
Controlled axes	6	

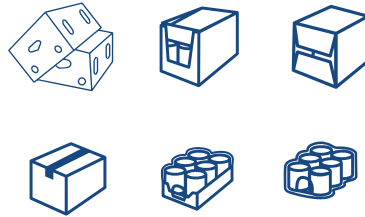# WHY *SAVVY* *Palletizing Solutions* ?

EFFICIENT

- Installation and start up in just **3 days**
- Pattern in **3 minutes**

VERSATILE

- **Any type** and **size** of case
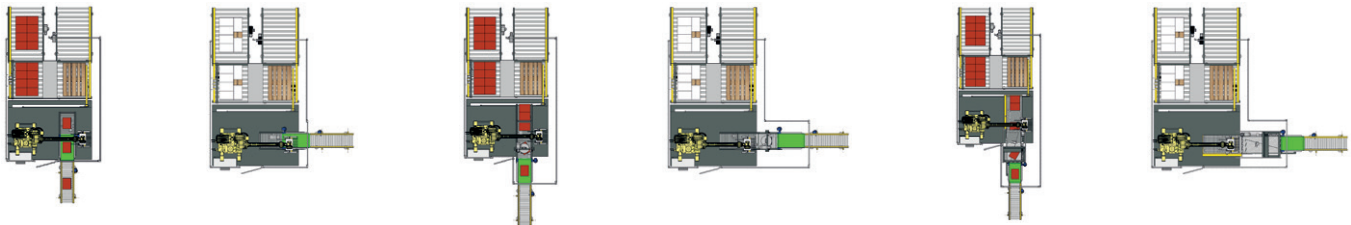 - From **4x4x8in** to **24x16x16in**

TOUGH

- **99% OEE** (Operating Equipment Efficiency)
- More than **50 installed SAVVY** palletizers
- **Safe** and **versatile** gripper
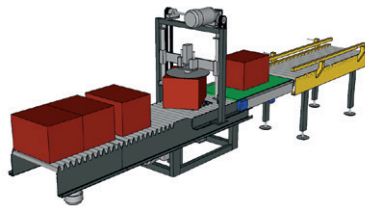
DRAWINGS AVAILABLE IN 2D AND 3D
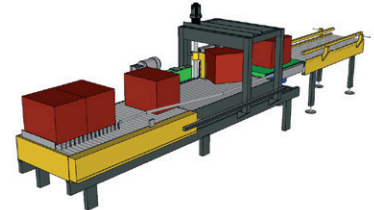
OPTIONAL FEATURES

STANDARD TABLE

UP TO 20 CASES PER MINUTE

UP TO 30 CASES PER MINUTE

SLIP SHEET DISPENSER

MANUAL FORKLIFT

PALLET DISPENSER

TDI PACKSYS

powered by

IPLA
Palletizing Engineering

CUSTOMERS WHO ALREADY HAVE SAVVY PAL: